

DIGITUS Cat.5e U/UTP installation cable, 305 m, simplex, Eca

DK-1511-V-305-1
EAN 4016032363811



CAT 5e U-UTP installation cable, 100 MHz Eca (PVC), AWG 24/1, 305 m paper box, sx, grey



The Digitus Cat 5e U7UTP installation cable is designed for use in the structured data center and the building cabling according to ISO/IEC 11801, DIN EN 50288-2-1, DIN EN 50173. The cable is perfectly suitable for the transmission of both analog and digital data and also supports POE. The shielding structure is composed of single shielded pairs with a tinned copper braid, which ensures excellent shielding and electrical values.

- Physical properties:
- Conductor: Bare annealed copper, solid AWG 24/1
- Insulation: PE (Polyethylene)
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Individual pair shield: None
- Overall shielding: None
- Outer sheath: Eca acc. to EN 50575; PVC
- Outer sheath diameter (nominal): 0.50 mm nominal
- Outer sheath color: Grey (RAL 7035)
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Shipping- and storage temperature range: -20 °C up to +75 °C


- Operating temperature range: -20 °C up to +60 °C
- Installation temperature range: 0 °C up to +50 °C
- Overall diameter Simplex (nominal): 4.7 mm nominal
- Electrical properties:
- Impedance: 100±5 Ohm @ 1-600 MHz
- Capacitance: 40 pF/m nominal @ 800 Hz
- Capacitance unbalance (pair-ground): 1.5 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC loop resistance: 147 Ohm/km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: CA-Type 3
- Signal propagation delay: 535 nS/100 m max.
- Propagation delay: 20 nS/100 m max.
- Separating class: „b“ acc. to EN 50174-2
- NVP: 69%
- Assortment: Twisted Pair Installation Cables
- Length: 305 m
- Category: CAT 5e
- Color: grey
- CPR: Eca
- Jacket: PVC
- Shielding: U-UTP, unshielded
- Shielding: U-UTP, unshielded
- Structure: 4 x 2 AWG 24/1, solid twisted pair

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	9.12	35.00	35.00	20.00	24,500.00
Packaging Unit Inside	1	9.12	35.00	35.00	20.00	24,500.00
Packaging Unit Single	1	9.12	35.00	35.00	20.00	24,500.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

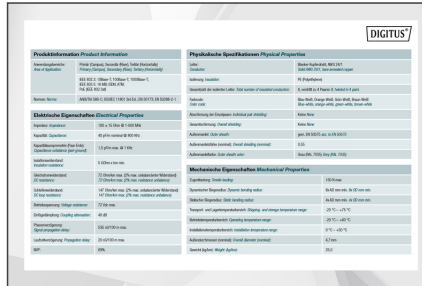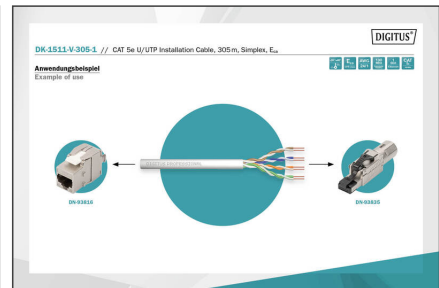

Leistungseigenschaften: Transmittanz-Properties									
Transp.	80%	90%	95%	98%	99%	99.5%	99.9%	99.95%	99.99%
Wiss.	0%	0%	0%	0%	0%	0%	0%	0%	0%
1	1	0.9	0.8	0.6	0.5	0.4	0.3	0.2	0.1
10	10	9.0	8.0	6.0	5.0	4.0	3.0	2.0	1.0
100	100	90.0	80.0	60.0	50.0	40.0	30.0	20.0	10.0
1000	1000	900.0	800.0	600.0	500.0	400.0	300.0	200.0	100.0
10000	10000	9000.0	8000.0	6000.0	5000.0	4000.0	3000.0	2000.0	1000.0
100000	100000	90000.0	80000.0	60000.0	50000.0	40000.0	30000.0	20000.0	10000.0
1000000	1000000	900000.0	800000.0	600000.0	500000.0	400000.0	300000.0	200000.0	100000.0

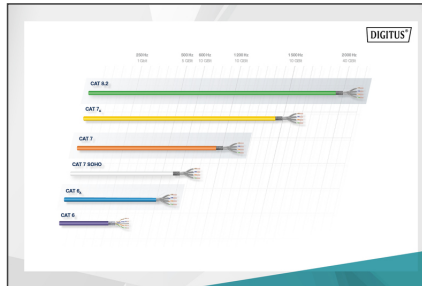[illegible]