


Rack Automatic Transfer Switch

Provides Power Redundancy for Single-Corded IT Equipment

User source preference selectable both locally and via network

Access, configure, and manage remotely via web interface, telnet, SNMP, SSH or StruxureWare™ Data Center Expert

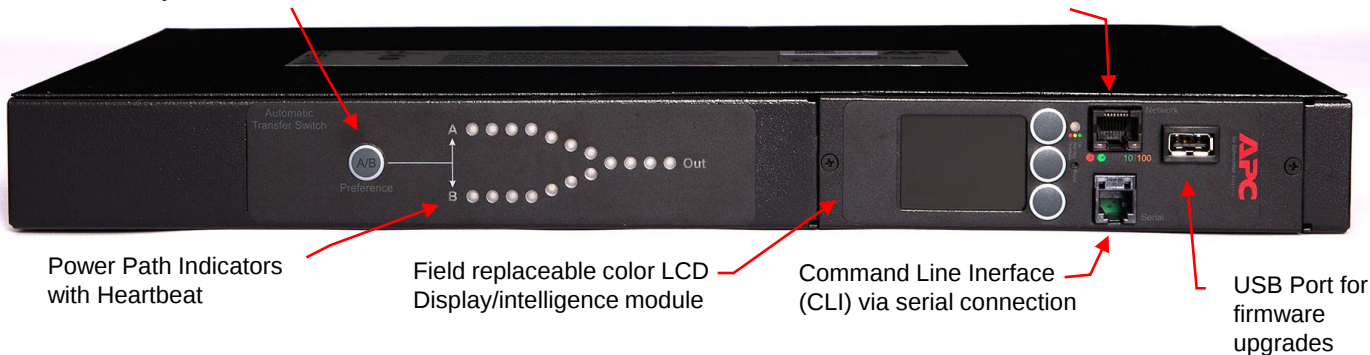

- Transfer Time < 10ms with continuous source monitoring
- Robust out-of-phase switching capability
- Enhanced cybersecurity (TLS 1.2)
- 10 KAIC overcurrent protection
- ROHS compliant, cd free

2U Model Example



SKU	Voltage	Primary Regions	AMP rating	Form Factor	Input (Qty 2)	Output	Replaces
AP 4450	100/120V	NAM/LAM/Japan	15A	1U	NEMA 5-15P	(10) NEMA 5-15R	AP 7750A
AP 4452	120V	NAM/LAM	20A	1U	NEMA L5-20P	(10) NEMA 5-20R	AP 7752
AP 4452J	100V	Japan	20A	1U	NEMA L5-20P	(10) NEMA 5-20R	AP 7752J
AP 4453	120V	NAM/LAM	30A	2U	NEMA L5-30P	(16) NEMA 5-20R	AP 7753
AP 4421	230V	EMEA/EAP/China	10A	1U	C14 Inlet	(12) C13	AP 7721
AP 4433	208V	NAM/LAM	12A	1U	C14 Inlet	(12) C13	AP 7721
AP 4422	230V	EMEA/EAP/China	16A	1U	IEC309-16A	(1) IEC309-16A	AP 7722A
AP 4423	230V	EMEA/EAP/China	16A	1U	C20 Inlet	(8) C13, (1) C19	AP 7723
AP 4434	208V	NAM/LAM	20A	1U	C20 Inlet	(8) C13, (1) C19	AP 7723
AP 4424	230V	EMEA/EAP/China	32A	2U	IEC309-32A	(16) C13, (2) C19	AP 7724
AP 4430	200/208V	NAM/LAM/Japan	20A	1U	NEMA L6-20P	(8) C13, (1) C19	AP 7730
AP 4431	208V	NAM/LAM	30A	2U	NEMA L6-30P	(1) L6-30R	AP 7731
AP 4432	200/208V	NAM/LAM/Japan	30A	2U	NEMA L6-30P	(16) C13, (2) C19	AP 7732