

T7, the Bladeshelter cutting-edge cabinet gets a makeover to become the T7^{PLUS}, an even more functional model that maintains the styling, robustness and capacity of the original model.



General features

Completely demountable, supplied assembled; high resistance steel structure, certified for 1500 kg of static load; Prepared for quick coupling to zero units of vertical PDUs; Availability of the conversion kit in an air-conditioned cabinet.

Dimensions:

Width: 600 or 800 mm

Height: 42U o 48U

Depth: 800, 1030 e 1200 mm

Roof

Easily removable roof, with double side cable entry with dust-proof brush; Additional cable entries through two sliding trapdoors.

Front door features

- Ventilated version with 82% perforation with vertical anti-twist ribbing.
- Glass version for cooling in closed loop layout
- 4-point lock
- 180 ° opening angle in battery and 270 ° free-standing

Rear door features

- Double door ventilated version with 82% perforation
- Double-door blind version
- 270 ° opening angle
- 3-point lock

Side panels (optional)

- Independent bi-sectional version;
- Single panel version.

19" uprights

- With unit counter
- Swift sliding system with an internal regulation
- Two sectional or three sectional rear uprights

Colours

Black, white, red, silver, anthracite, amazon blue





Standard version with front 19" uprights single section and rear 19" upright two sections. Front and rear upright in two section on demand



Code	U	W mm	D mm	Description
TX6142N1G2G	42	600	1030	Rack with front single door and rear double door; 82% perforation; without side panels - black - with wheels and levelling feet
TX8142N1G2G	42	800	1030	
TX6148N1G2G	48	600	1030	
TX8148N1G2G	48	800	1030	
TX6242N1G2G	42	600	1200	
TX8242N1G2G	42	800	1200	
TX6248N1G2G	48	600	1200	
TX8248N1G2G	48	800	1200	
TX8842N1G2G	42	800	800	Rack with front glass single door and rear metal double door - without side panels - black - with wheels and levelling feet
TX8848N1G2G	48	800	800	
TX6142N1V2M	42	600	1030	
TX8142N1V2M	42	800	1030	
TX6148N1V2M	48	600	1030	
TX8148N1V2M	48	800	1030	
TX6242N1V2M	42	600	1200	
TX8242N1V2M	42	800	1200	
TX6248N1V2M	48	600	1200	Rack with front glass single door and rear metal double door - without side panels - black - with wheels and levelling feet. Fit only with TecnoCooling machines
TX8248N1V2M	48	800	1200	
TX8842N1V2M	42	800	800	
TX8848N1V2M	48	800	800	
TX6142N1V2MCL	42	600	1030	
TX8142N1V2MCL	42	800	1030	
TX6148N1V2MCL	48	600	1030	
TX8148N1V2MCL	48	800	1030	
TX6242N1V2MCL	42	600	1200	
TX8242N1V2MCL	42	800	1200	
TX6248N1V2MCL	48	600	1200	
TX8248N1V2MCL	48	800	1200	



MultiSection version on demand (with 3 - section uprights)

	TX8248N1G2G		Dimensions: mm	  
	Datacenter Server Rack			
	L/W 800 mm • P/D 1200 mm • H 2340 mm • 48U			
	11 12 2015		Pag. 1 / 4	

Questo disegno è proprietà intellettuale di Tecnosteel; secondo le leggi vigenti non può essere copiato, riprodotto o mostrato.

This drawing is the intellectual property of Tecnosteel; according to the laws in force it cannot be copied, reproduced or shown.

Questo disegno è proprietà intellettuale di Tecnosteel; secondo le leggi vigenti non può essere copiato, riprodotto o mostrato.
This drawing is the intellectual property of Tecnosteel; according to the laws in force it cannot be copied, reproduced or shown.

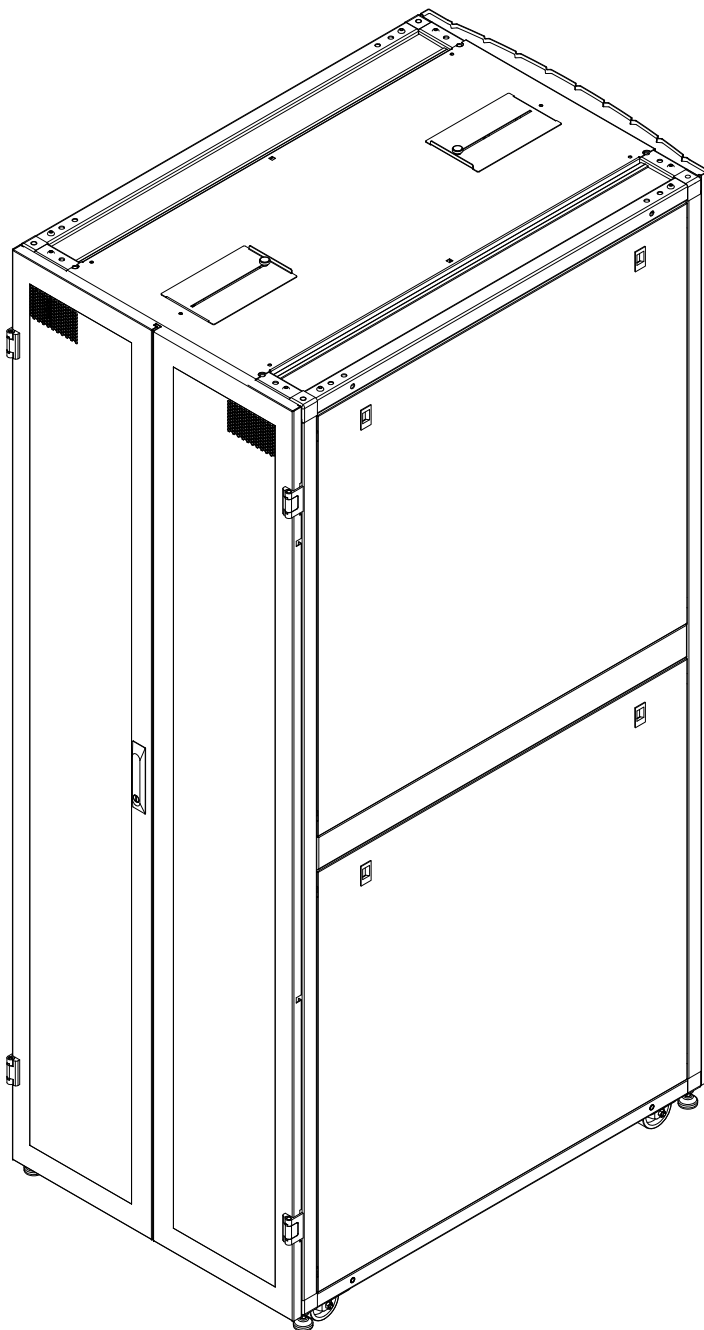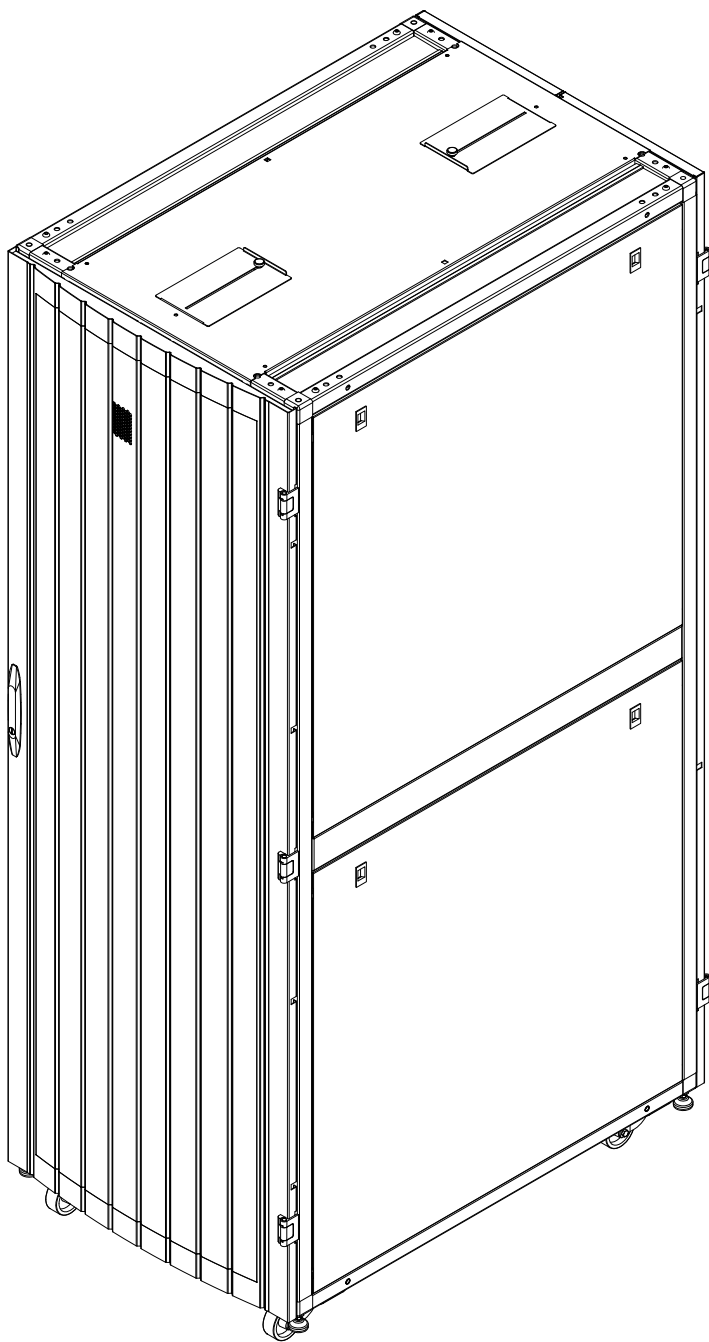

Specifiche TX8248N1G2G

Dimensioni nominali	L 800 mm • P 1200 mm • H 2340 mm • 48U utili
Chassis	Lamiera di acciaio spessore 1,5 mm • completamente smontabile
Montanti anteriori e posteriori standard	Lamiera di acciaio, regolabili in profondità con numerazione conta unità. Passacavi laterali 3 slot 19" 2U verticali
Montanti posteriori a 2 sezioni (opzionali)	In 2 sezioni; in lamiera di acciaio, regolabili in profondità con numerazione conta unità. Passacavi laterali 3 slot 19" 2U verticali
Porta anteriore	Bombata in lamiera di acciaio 1,5 mm, areata 82% - apertura 270°
Porta posteriore	A doppio battente, in lamiera di acciaio 1,5 mm, areata 82% - 270°
Tetto	In lamiera di acciaio spessore 1,5 mm. Con 2 sportelli per passaggio cavi, con asole di areazione e attacchi per gruppo ventole
Chiusura fondo opzionale	Piastra in lamiera di acciaio spessore 1,5 mm con 2 sportelli per passaggio cavi e 2 passaggi cavi laterali con spazzole antipolvere
Chiusura laterale	Doppia coppia di pannelli rimovibili - spessore 1 mm - opzionali
Appoggi a terra	4 piedini di livellamento e 4 ruote
Portata statica	1.500 Kg
Finitura	Vernice a polvere epossidiche
Colore	Nero standard Tecnosteel
Imballo	Filmato, con angolari paracolpi, coppia di staffe stabilizzatrici

TX8248N1G2G Specifications

Nominal size	W 800 mm • D 1200 mm • H 2340 mm • 48U useful
Chassis	In steel sheet 1,5 mm thick • totally disassemblable
Standard 19" front and rear uprights	In steel sheet, adjustable depth with numbering units.
2 sections 19" rear uprights (optional)	In 2 sections; in steel sheet, adjustable depth with numbering units.
Front door	With side cable duct 3 vertical 19" 2U slots
Rear door	In 2 sections; in steel sheet, adjustable depth with numbering units.
Roof	With side cable duct 3 vertical 19" 2U slots
Optional bottom closure	Rounded 1.5 mm thick steel sheet made. 82% perforation. Opening 270°
Side closure	Double flat door 1.5 mm thick steel sheet made. 82% perforation • 270°
Support mode	Made of 1.5 mm thick steel sheet, with 2 little sliding doors for cable entry and 2 side cable entries with dust-proof brushes
Load capacity	Steel plate of removable panels - 1.5 mm thick, with 2 little sliding doors for cable entry and 2 side cable entries with dust-proof brushes
Finishing	Double pair of removable panels - 1 mm thick - Optional
Colour	4 leveling feet and 4 wheels
Packing	1,500 Kg in static mode
	Epoxy powder paint
	Tecnosteel standard black
	Corner bumpers, couple of stabilizing brackets, wrapped in transparent film

